


ROBERTA (Manual) XF003



ROBERTA (Manual)	XF003
Kapazität	3 342x242
Abstand	70 mm
Frequenz	50 / 60 Hz
Spannung	230 V~ 1N
Anschlusswert	2,7 kW
Abmessungen	480x402x523 mm
Gewicht	16 kg

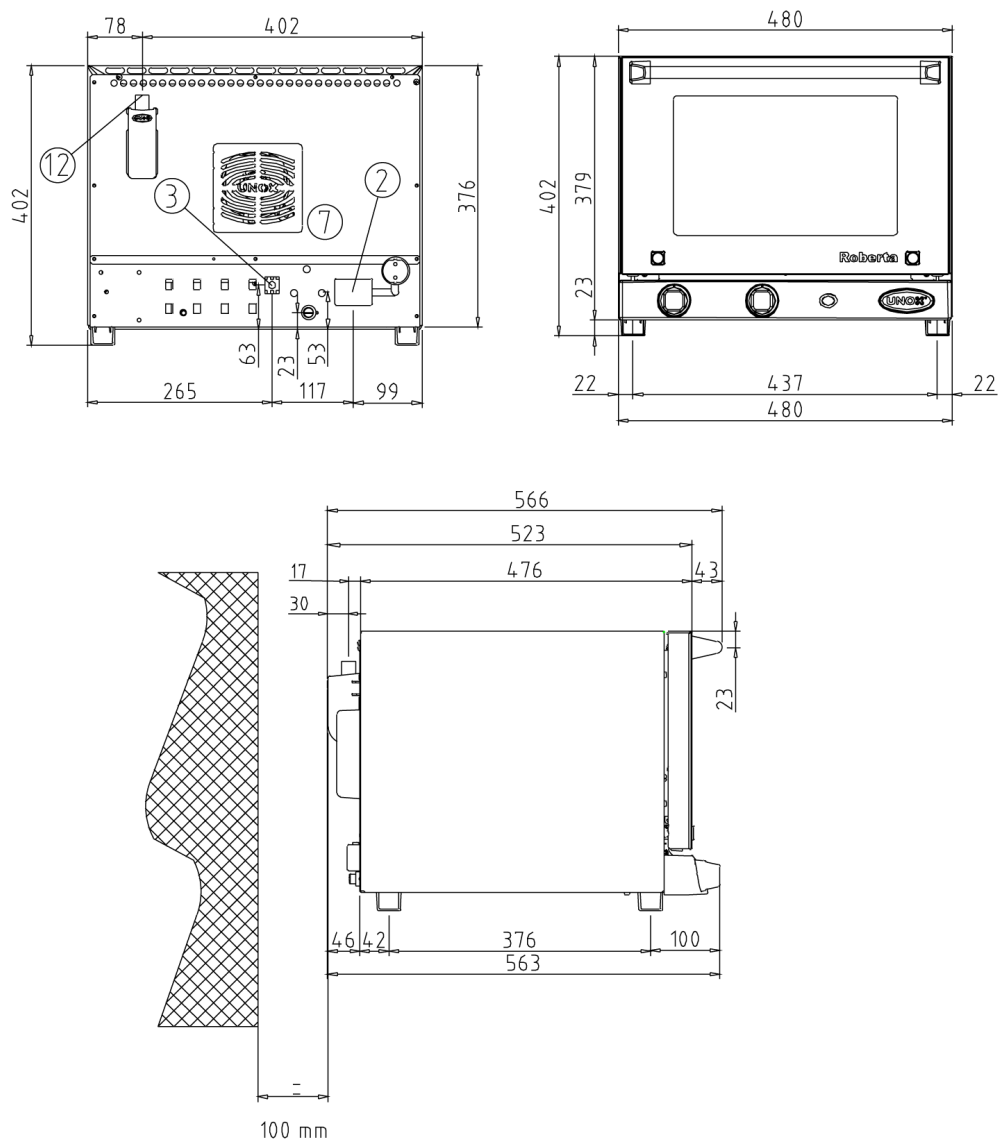

ELETTRICO

BAKING MODES

Convection baking 30 °C - 260 °C	•
Mixed humidity and convection baking 48 °C - 260 °C	-

AIR DISTRIBUTION IN THE BAKING CHAMBER

AIR.Maxi™ technology: fans with reversing gear for models 600x400	•
AIR.Maxi™ technology: fans with reversing gear for models 460x330	-

CLIMA MANAGEMENT IN THE BAKING CHAMBER

DRY.Maxi™ technology: quick extraction of the humidity from the baking chamber	•
STEAM.Maxi™ technology: injection humidity from 20 to 100%, settable from the control panel	-
STEAM.Maxi™ technology: manual injection humidity	-
Pompa che permette al forno di aspirare acqua dal serbatoio (per modelli 460x330)	-
Elettrovalvola che permette di collegare il forno direttamente alla rete idrica (per modelli 600x400)	-

PANS

Pans aluminium flat (only for models 460x330)	•
---	---

AUXILIARIES FUNCTIONS

70 baking programs memory, each one composed by 3 steps	-
70 baking programs memory, each one composed by 1step	-
Protek.SAFE™ technology: maximum thermal efficiency and working safety (cold door glass and external surfaces)	•
Visualization of the set and real values of time left to finish the baking program	•
Continuous functioning «INF»	•
Visualization of the set and real values of the baking chamber temperature	-
Temperature unit settable in °C or °F	-

DOOR OPENING

Manual up-to-down door opening	•
Right-to-left door opening	-
Automatic door opening at the end of the baking program	-

TECHNICAL DETAILS

Rounded baking chamber made of high resistant AISI 304 stainless steel for hygiene and easy of cleaning	-
Rounded baking chamber made of high resistant ferritic steel for hygiene and easy of cleaning	•
Halogen lights	-
Baking chamber lights	•
Light weight – heavy duty structure using innovative materials	•
Proximity door contact switch	• (XF043)
Autodiagnosys system for problems or brake down	-
Safety temperature switch	•